


# BANDO V-RIBBED BELTS (RUBBER)

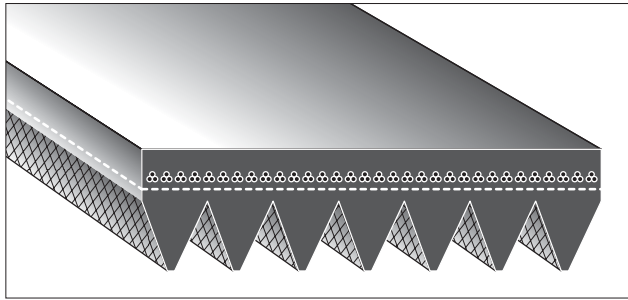

## Construction

- 1: Chloroprene backside rubber
- 2: Polyester tensile members
- 3: Chloroprene compression rubber
- 4: Rubber impregnated canvas (no canvas Type J)


## Features + Benefits

- High horsepower rating.  
V ribbed belts have a 30-50% higher HP rating than multiple V belts.
- Space saving  
Pulleys with outside diameters as small as 0.8" can be used. (Type J)
- Lower vibration than flat belts.  
Comparable to flat belts.
- Oil and heat resistant.

## Standard Sizes

Type	belt number	Effective length		belt number	Effective length		belt number	Effective length	
		mm	inch		mm	inch		mm	inch
J	108J	274.3	10.8	245J	622.3	24.5	360J	114.4	36.0
	117J	297.2	11.7	251J	637.5	25.1	370J	939.8	37.0
	132J	335.3	13.2	260J	660.4	26.0	380J	965.2	38.0
	140J	355.6	14.0	278J	706.1	27.8	390J	990.0	39.0
	159J	403.9	15.9	280J	711.2	28.0	400J	1016.0	40.0
	180J	457.2	18.0	300J	762.0	30.0	430J	1092.2	43.0
	190J	482.6	19.0	307J	779.8	30.7	450J	1143.0	45.0
	199J	505.5	19.9	315J	800.1	31.5	460J	1168.4	46.0
	210J	533.4	21.0	323J	820.4	32.3	470J	1193.8	47.0
	220J	558.8	22.0	330J	838.2	33.0	474J	1204.0	47.4
	224J	569.0	22.4	337J	856.0	33.7	490J	1244.6	49.0
	235J	596.9	23.5	340J	863.6	34.0	520J	1320.8	52.0
	240J	609.0	24.0	350J	889.0	35.0	530J	1346.2	53.0
	L	214L	543.6	21.4	410L	1041.4	41.0	730L	1854.2
241L		612.1	24.1	415L	1054.1	41.5	750L	1905.0	75.0
260L		660.4	26.0	417L	1059.2	41.7	780L	1981.2	78.0
277L		703.6	27.7	423L	1074.4	42.3	815L	2070.1	81.5
290L		736.6	29.0	470L	1193.8	47.0	835L	2120.9	83.5
327L		830.6	32.7	490L	1244.6	49.0	865L	2197.1	86.5
337L		856.0	33.7	515L	1308.1	51.5	932L	2367.3	93.2
344L		873.8	34.4	530L	1346.2	53.0	975L	2476.5	97.5
347L		881.4	34.7	540L	1371.6	54.0	1016L	2580.6	101.6
348L		883.9	34.8	570L	1447.8	57.0	1063L	2700.0	106.3
358L		909.3	35.8	600L	1524.0	60.0	1120L	2844.8	112.0
362L		919.5	36.2	615L	1562.1	61.5	1200L	3048.0	120.0
376L		955.0	37.6	650L	1651.0	65.0	1480L	3759.2	148.0
386L		980.4	38.6	680L	1727.2	68.0			
395L		1003.3	39.5	690L	1752.6	69.0			
M		417M	1059.2	41.7	851M	2161.5	85.1	1310M	3327.4
	557M	1414.8	55.7	878M	2230.1	87.8	1470M	3733.8	147.0
	630M	1600.2	63.0	990M	2514.6	99.0	1900M	4826.0	190.0
	652M	1656.1	65.2	1150M	2921.0	115.0			
	756M	1920.2	75.6	1230M	3124.2	123.0			

## Dimensions



Type	Thickness (b)		Angle $\theta$	Pitch (p)	
	mm	inch		mm	inch
J	4.0	0.16	40°	2.34	0.092
L	9.0	0.34	40°	4.70	0.185
M	16.5	0.65	40°	9.40	0.370

## Size code

